


PLAN FOR 18' OR LESS PIPE

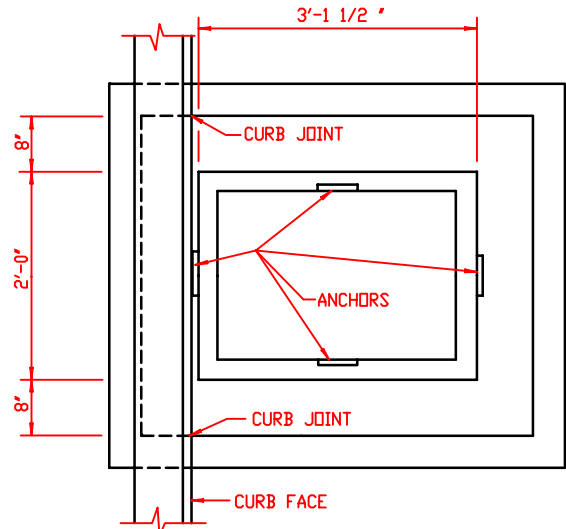


PLAN FOR 18'-24' PIPE

NOTES:

1. ITEM 655.02 FRAME & GRATE- FRAME 2'-4 15/16" X 3'-1 1/2" GRATE 2'-3 11/16" X 3'-0 1/2" RECTANGULAR FRAME & GRATE ASSEMBLY TYPE NO. 11, SEE N. Y. S. D. O. T. STANDARD SHEETS 655-4R1, 655-5R1, 655-6R1 AND 655-3. PAYMENT AREA = 7.2 SQ. FEET
2. REINFORCEMENT SHALL HAVE A COVER OF 2" UNLESS OTHERWISE SHOWN. THE COST OF ALL BAR REINFORCEMENT SHALL BE INCLUDED IN THE PRICE BID FOR DROP INLETS.
3. ALL CONCRETE FOR DROP INLETS SHALL BE CLASS 'A'. BENCHES SHALL BE CAST-IN-PLACE.
COST TO BE INCLUDED IN DROP INLET ITEM.
4. FILL WITH CEMENT MORTAR AND SEAL WITH ASPHALT EMULSION TACK COAT BETWEEN FRAME AND CURB. PAYMENT SHALL BE INCLUDED IN APPROPRIATE CURB ITEM.
5. THE INTERIOR AND EXTERIOR OF ALL DROP INLETS TO BE COATED WITH TWO COATS OF KOPPERS SUPER SERVICE BACKLOR-ARROBEN EQUALS REGARDLESS OF PIPE DIAMETER.

CONCRETE CURB, ITEM 609.04
GRANITE CURB, ITEM 609.02

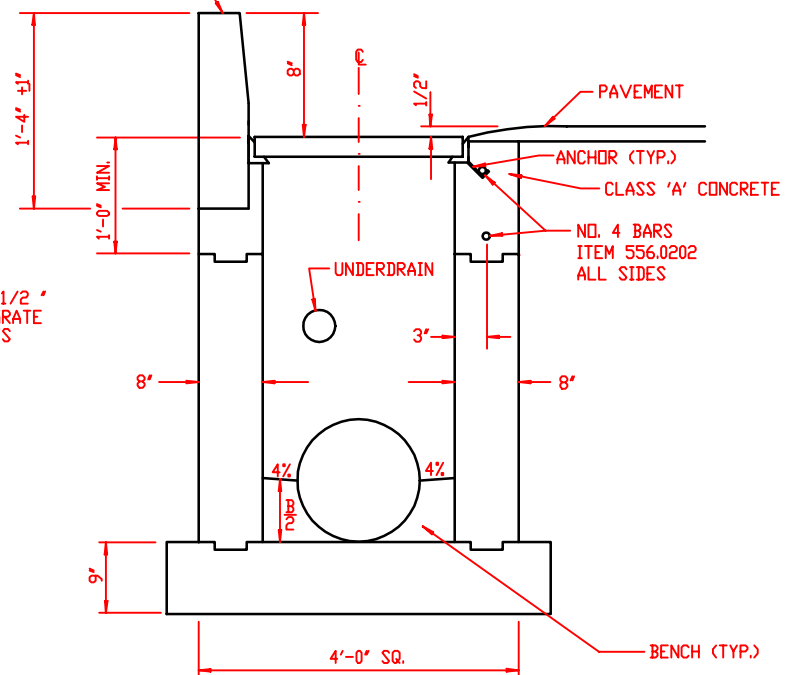

SECTION A-A

DROP INLET TYPE 'S' CAST-IN-PLACE AGAINST CURB (ENGLISH)

NOT TO SCALE